


# CMS HALF SLAB

CMS Concrete Products presents the CMS Half Slab system - a pre-cast floor panel that is a direct equivalent of an in-situ slab which combines pre-cast and in-situ concrete. Typically between 75 to 150mm thick and 1200 to 2400mm in width, the CMS Half Slab can span up to 8m in length with enhancement by prestressed strands.

## ISOMETRIC VIEW OF TYPICAL CMS HALF SLAB

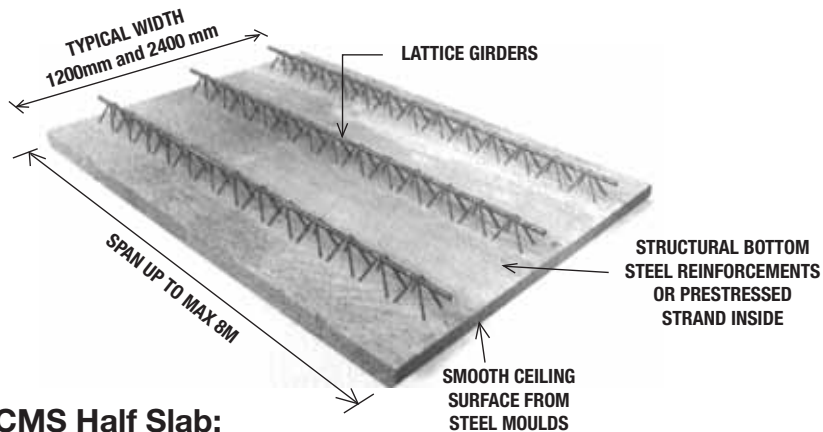

### Benefits of the CMS Half Slab:

#### Consistent Quality:

- Fabricated to ISO:9001 quality standard under a controlled environment for best performance & consistent quality

#### Fast installation:


- Large panels mean less lifting
- Large areas of floor can be erected in a short time
- Less wet works makes for a cleaner construction site & less debris
- Projects can be completed ahead of schedule - for faster investment returns

#### Design flexibility:

- In-situ structural concrete topping forms a monolithic structure for efficient design
- Irregular & complex shapes can be manufactured to suit client / architectural requirements
- Service holes & cut-outs accurately formed during manufacturing process
- Smooth flat soffit can take direct decoration - top surfaces can be power-floated, thereby reducing depth of overall floor zone

#### Cost effective:

- Competitively priced against traditional formwork & propping
- Decorated soffit can be left exposed - negating suspended ceilings
- In-situ topping can be power-floated - negating extra finishing screed

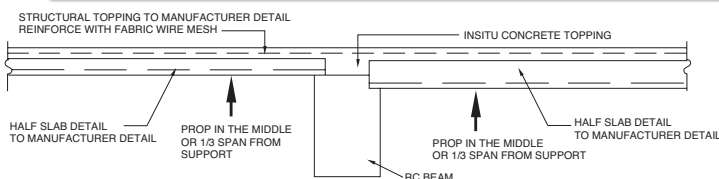

**CMS CONCRETE PRODUCTS**

**CMS Concrete Products Sdn Bhd** (366884-X)  
 Lot 212 Block 17 KCLD, Jalan Old Airport, 93250 Kuching, Sarawak.  
 T: 082 - 614 436, 082 - 618 718 F: 082 - 614 406

[www.cmsb.com.my/concrete](http://www.cmsb.com.my/concrete)

2011